


**FEATURES**

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

**APPLICATIONS**

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter

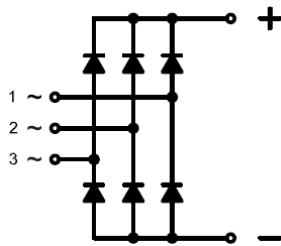

**MODULE TYPE**

Module Type	V <sub>RRM</sub> (Repetitive Peak Reverse Voltage)	V <sub>RSM</sub> (Non-Repetitive Peak Reverse Voltage)	Unit
MMD70E120X	1200	1300	V
MMD70E140X	1400	1500	
MMD70E160X	1600	1700	
MMD70E180X	1800	1900	

**ABSOLUTE MAXIMUM RATINGS**

*T<sub>c</sub>=25°C unless otherwise specified*

Symbol	Parameter	Test Conditions	Values	Unit
I <sub>D</sub>	Output Current(D.C.)	Three phase, half wave, T <sub>c</sub> = 95°C	70	A
I <sub>FSM</sub>	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value T <sub>c</sub> =45°C	700	
		1/2 cycle, 60HZ, peak value T <sub>c</sub> =45°C	750	
I <sup>2</sup> t	I <sup>2</sup> t (For Fusing)	1/2 cycle, 50HZ, peak value T <sub>c</sub> =45°C	2.45	KA <sup>2</sup> s
		1/2 cycle, 60HZ, peak value T <sub>c</sub> =45°C	2.33	KA <sup>2</sup> s
P <sub>D</sub>	Power Dissipation		690	W
T <sub>J</sub>	Junction Temperature		-40 to +150	°C
T <sub>STG</sub>	Storage Temperature Range		-40 to +125	°C
V <sub>ISO</sub>	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module-to-Sink	Recommended (M5)	2.5~5	N.m
Torque	Module Electrodes	Recommended (M5)	2.5~5	N.m
R <sub>th (J-C)</sub>	Junction-to-Case Thermal Resistance	Per diode	1.1	K/W
		Per module	0.18	
Weight			150	g

# MMD70E

## ELECTRICAL AND THERMAL CHARACTERISTICS $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{RM}$	Max.Reverse Leakage Current	$V_R = V_{RRM}$			500	$\mu\text{A}$
		$V_R = V_{RRM}, T_J = 125^\circ\text{C}$			10	mA
$V_F$	Forward Voltage	$I_F = 70\text{A}$			1.35	V
$V_{T0}$	For power-loss calculations only				0.95	V
$r_T$	$T_J = 125^\circ\text{C}$				4.7	m $\Omega$

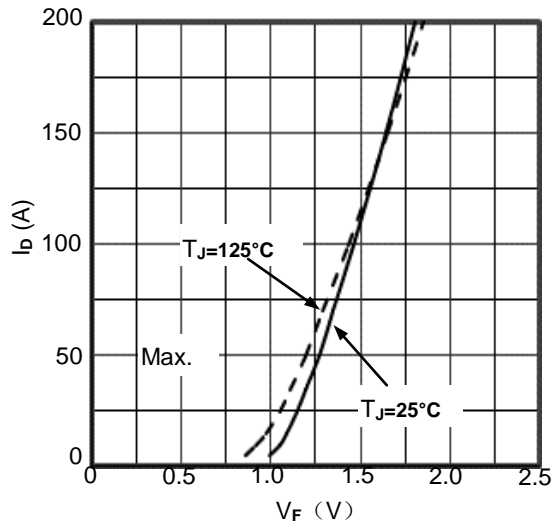


Figure1. Forward Voltage Drop vs Output Current

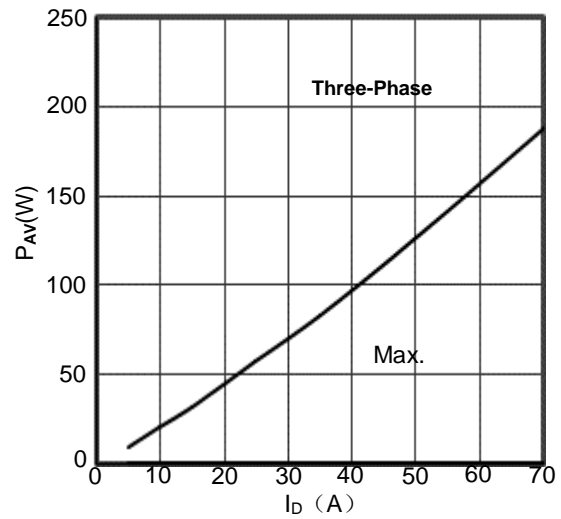


Figure2. Power dissipation vs. Output Current

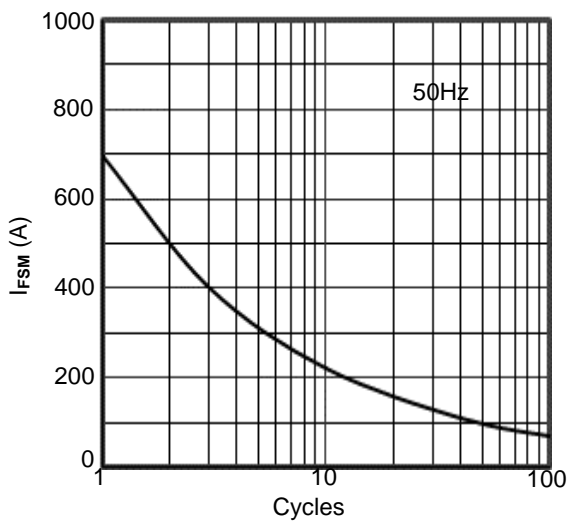


Figure3. Max Non-Repetitive Forward Surge Current

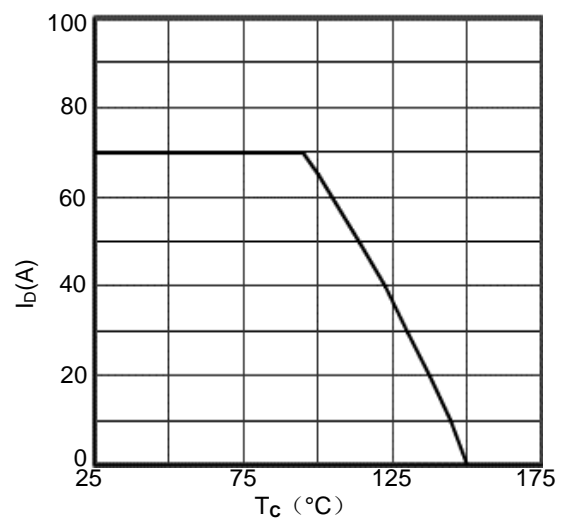


Figure4. Output Current vs. Case temperature


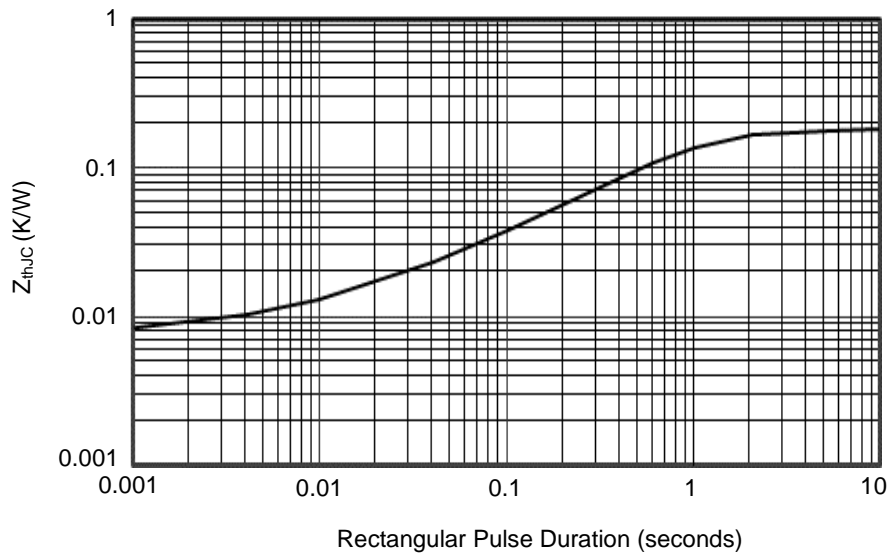


Figure5. Transient Thermal Impedance

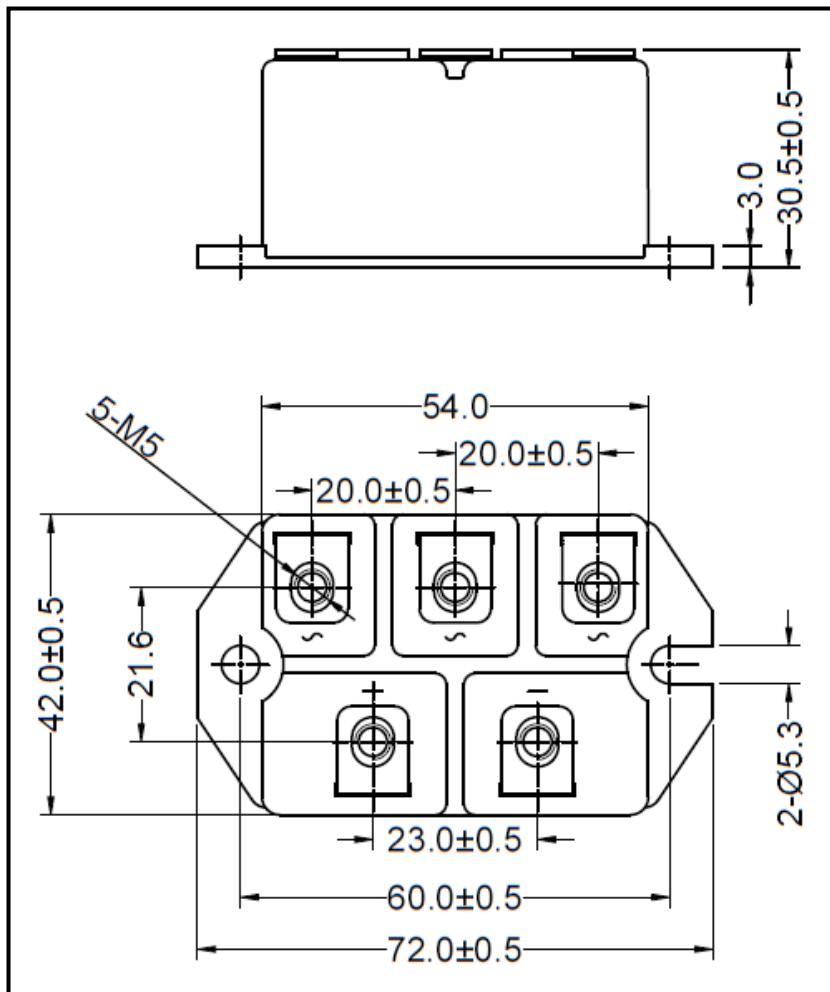

Dimensions in Millimeters  
Figure6. Package Outline