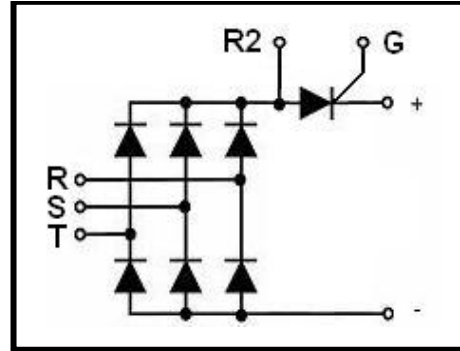


Features

- Isolated Module Package
- Isolation voltage 3000 V
- Three Phase Bridge and a Thyristor


Applications

- Current Stabilized Power Supply
- Switching Power Supply
- Inverter For AC or DC Motor Control


■ Diode
ABSOLUTE MAXIMUM RATINGS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Max.	Unit
V_{RRM}	Repetitive Reverse Voltage		1600	V
$I_{D(AV)}$	Average Forward Current	$T_C=90^{\circ}\text{C}$, module	75	A
I_{FSM}	Non-Repetitive Surge Forward Current	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, 50Hz, Sine	1050	A
		$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	1150	A
I^2t	I^2t (For Fusing)	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, 50Hz, Sine	5.5	kA^2s
		$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	5.4	kA^2s
T_J	Junction Temperature		-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^{\circ}\text{C}$
V_{isol}	Insulation Test Voltage	AC, 50Hz, $t=1\text{min}$	3000	V
Weight			332	g

ELECTRICAL AND THERMAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Reverse Leakage Current	$V_R=1600\text{V}$	--	--	500	μA
		$V_R=1600\text{V}$, $T_J=125^{\circ}\text{C}$	--	--	5	mA
V_F	Forward Voltage	$I_F=75\text{A}$	--	1.05	--	V
		$I_F=75\text{A}$, $T_J=125^{\circ}\text{C}$	--	1.0	--	V
$R_{\theta JC}$	Thermal Resistance Junction-to-Case	per diode	--	--	0.9	$^{\circ}\text{C}/\text{W}$
		per module	--	--	0.15	$^{\circ}\text{C}/\text{W}$
$R_{\theta CS}$	Thermal Resistance Case -to-Sink	per diode	--	--	0.48	$^{\circ}\text{C}/\text{W}$
		per module	--	--	0.08	$^{\circ}\text{C}/\text{W}$

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

 Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

■ Thyristor

ABSOLUTE MAXIMUM RATINGS $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Test Condition	Value	Unit
V_{RRM}		1600	V
$I_{T(AV)}$	$T_C=90^{\circ}\text{C}$, 180° conduction, half sine wave;	75	A
I_{TSM}	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$ (50Hz), sine, $V_R=V_{RRM}$;	1250	A
	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$ (60Hz), sine, $V_R=V_{RRM}$;	1350	
i^2t	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$ (50Hz), sine, $V_R=V_{RRM}$;	7.8	kA^2s
	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$ (60Hz), sine, $V_R=V_{RRM}$;	7.5	
dV/dt	$T_J=125^{\circ}\text{C}$, exponential to 67% rated V_{DRM}	1000	V/us
dI/dt	$T_J=125^{\circ}\text{C}$, $I_{TM}=200\text{A}$ rated V_{DRM}	150	A/us
V_{ISOL}	50Hz, all terminals shorted, $t=1\text{s}$, $I_{ISOL}\leq 1\text{mA}$;	3000	V~
T_J	Max. junction operating temperature range	-40~125	$^{\circ}\text{C}$
T_{STG}	Max. storage temperature range	-40~125	$^{\circ}\text{C}$
	Mounting torque(M6)	3 to 5	N·m
	Terminal connection torque(M6)	3 to 5	N·m
	Terminal connection torque(M4)	1 to 2	N·m

ELECTRICAL AND THERMAL CHARACTERISTICS $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Test Condition	Min.	Typ.	Max.	Unit
I_{DRM}/I_{RRM}	$T_J=125^{\circ}\text{C}$, $V_D=V_R=1600\text{V}$;			20	mA
V_{TM}	$I_{TM}=235\text{A}$, $t_d=10\text{ms}$, half sine;		1.50		V
V_{GT}	$V_A=6\text{V}$, $R_A=1\Omega$, $T_J=-40^{\circ}\text{C}$;			4	V
	$V_A=6\text{V}$, $R_A=1\Omega$;			2.5	
	$V_A=6\text{V}$, $R_A=1\Omega$, $T_J=125^{\circ}\text{C}$;			1.7	
I_{GT}	$V_A=6\text{V}$, $R_A=1\Omega$, $T_J=-40^{\circ}\text{C}$;			200	mA
	$V_A=6\text{V}$, $R_A=1\Omega$;			100	
	$V_A=6\text{V}$, $R_A=1\Omega$, $T_J=125^{\circ}\text{C}$;			80	
P_{GM}	$t_p\leq 5\text{ms}$, $T_J=125^{\circ}\text{C}$;			12	W
$P_{GM(AV)}$	$f=50\text{Hz}$, $T_J=125^{\circ}\text{C}$;			3	W
R_{thjc}	Thermal Resistance , Junction-to-Case			0.35	K/W
R_{THCS}	Thermal Resistance, Case -to-Sink			0.15	K/W

Characteristic curves

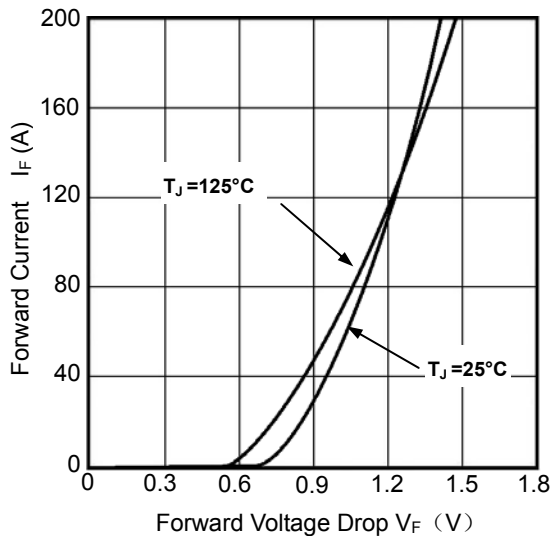


Figure 1. Diode Forward Voltage Drop vs Forward Current

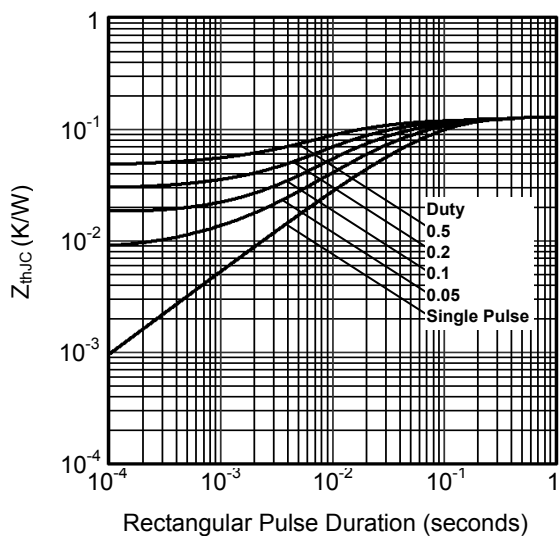


Figure 2. Diode Thermal Impedance Z_{thJC}

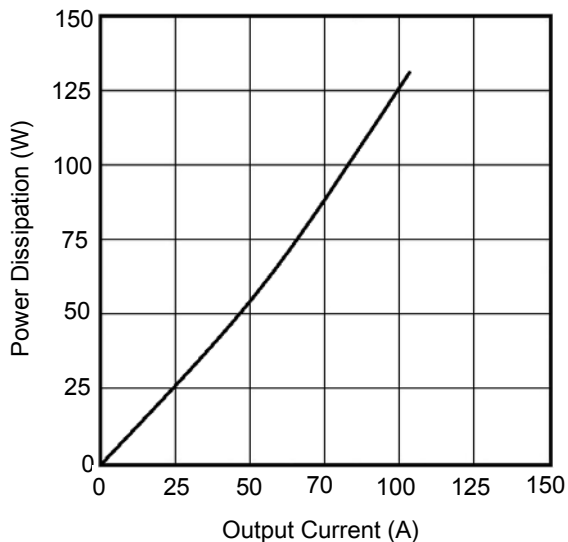


Figure 3. SCR Output Current vs Power Dissipation

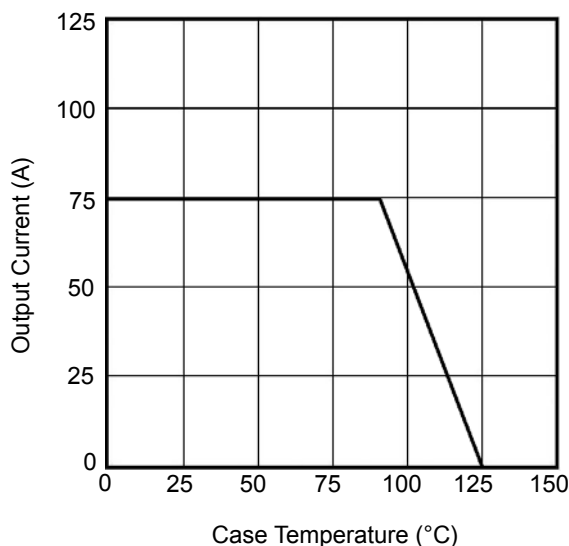


Figure 4. SCR Output Current vs Case Temperature

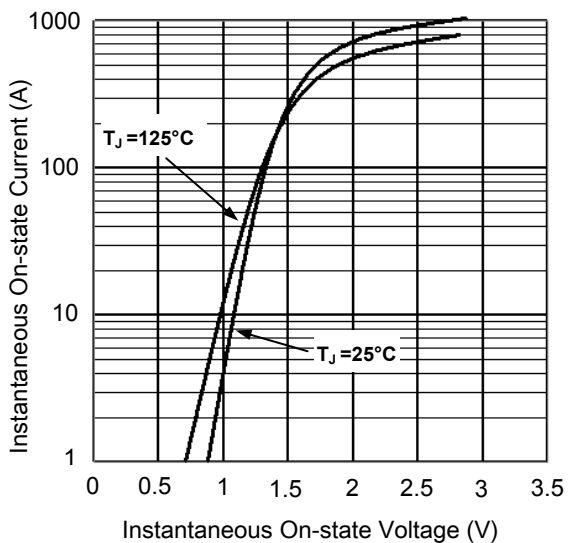


Figure 5. SCR On State Voltage Drop

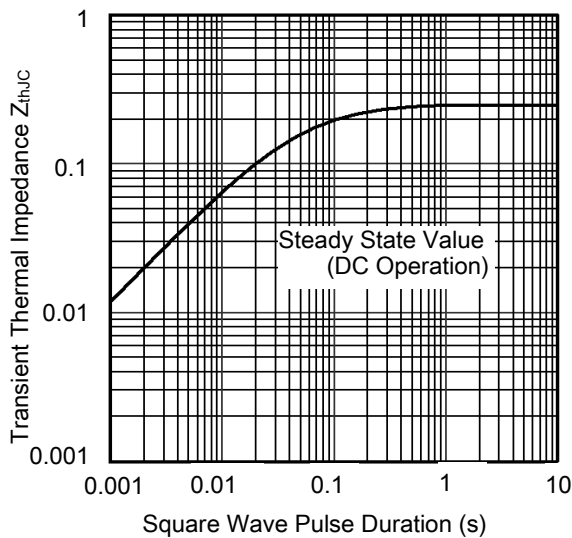


Figure 6. SCR Thermal Impedance Z_{thJC}

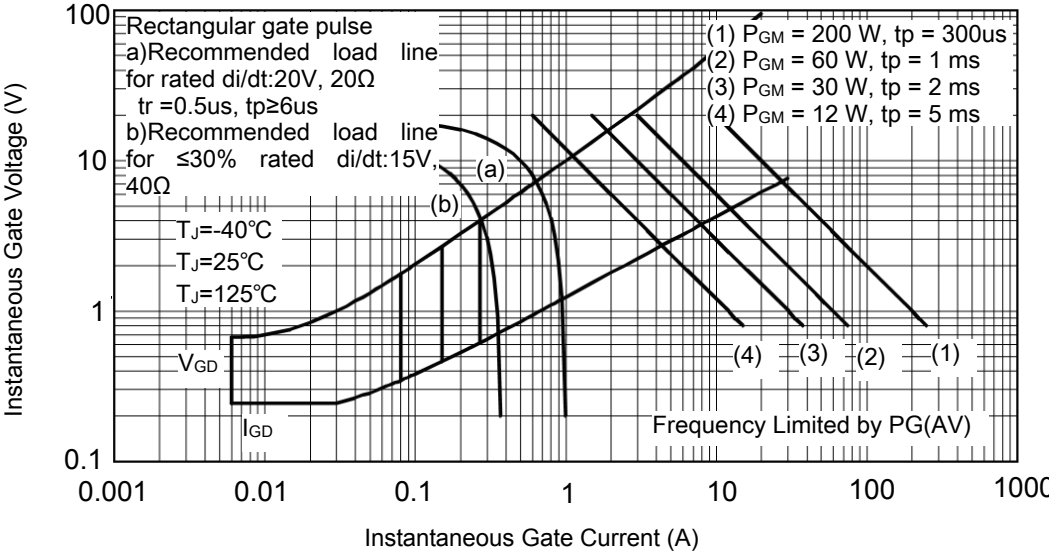


Figure 7. Gate Characteristics

Package Outline (Dimensions in mm)

